




FOV @ 4.5x

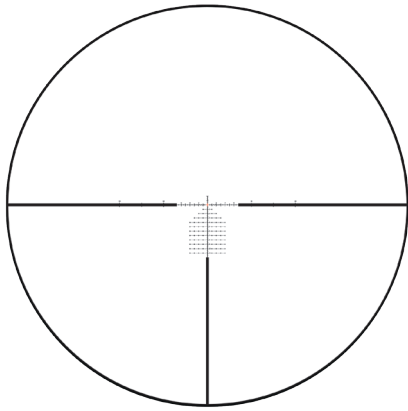


FOV @ 4.5x

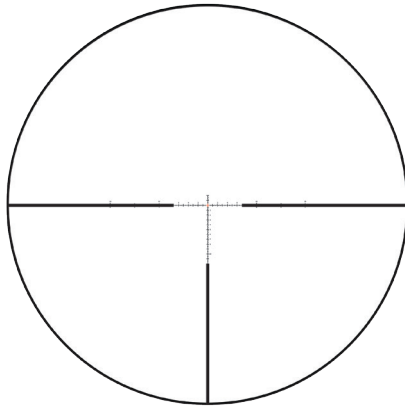


FOV @ 4.5x

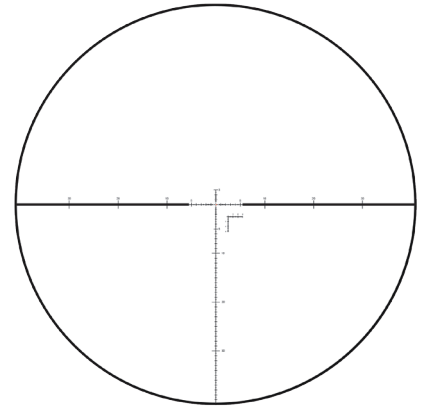


FOV @ 30x

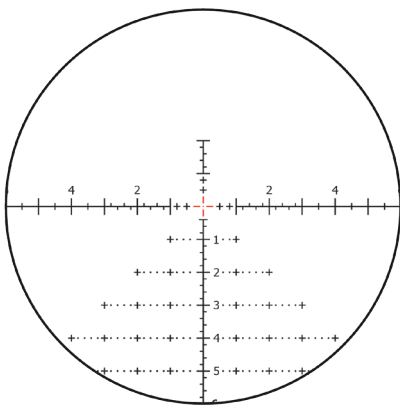

FOV @ 30x

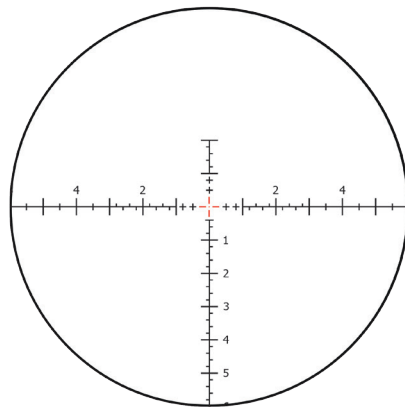

FOV @ 30x

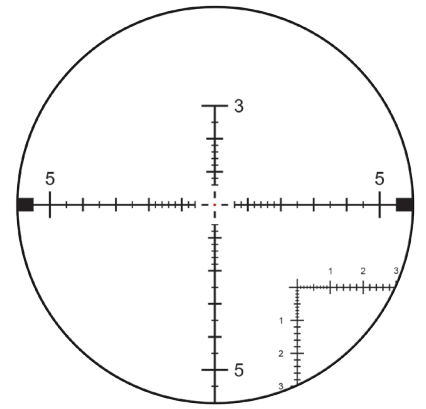

4.5-30x56 HD FFP
LRD-1T
#DO-2500

4.5-30x56 HD FFP
LRD-1P
#DO-2501

4.5-30x56 HD FFP
DLR-1
#DO-2502

Model	4.5-30x56 HD FFP	4.5-30x56 HD FFP	4.5-30x56 HD FFP
Item #	DO-2500	DO-2501	DO-2502
Magnification	4.5 - 30x	4.5 - 30x	4.5 - 30x
Objective diameter	56 mm	56 mm	56 mm
Field of view @ 100 m	8.3 - 1,2 m	8.3 - 1.2 m	8.3 - 1.2 m
Exit Pupil, mm	8.8 - 1.9 mm	8.8 - 1.9 mm	8.8 - 1.9 mm
Eye Relief, mm	81 - 97 mm	81 - 97 mm	81 - 97 mm
Water Proof (N2)	0.3 kg / cm ²	0.3 kg / cm ²	0.3 kg / cm ²
Reticle type	LRD-1T	LRD-1P	DLR-1
Illuminated reticle	+	+	+
1 click	0.1 MIL (10 mm @ 100 m)	0.1 MIL (10 mm @ 100 m)	0.1 MIL (10 mm @ 100 m)
Parallax adjustment	+	+	+
Tube diameter	34 mm	34 mm	34 mm
Length	365 mm	365 mm	365 mm
Weight	1014 g	1014 g	1014 g
Warranty	10 years	10 years	10 years